


specification

Customer		Name	Paddle switch	Type	MR-JX
----------	--	------	---------------	------	-------

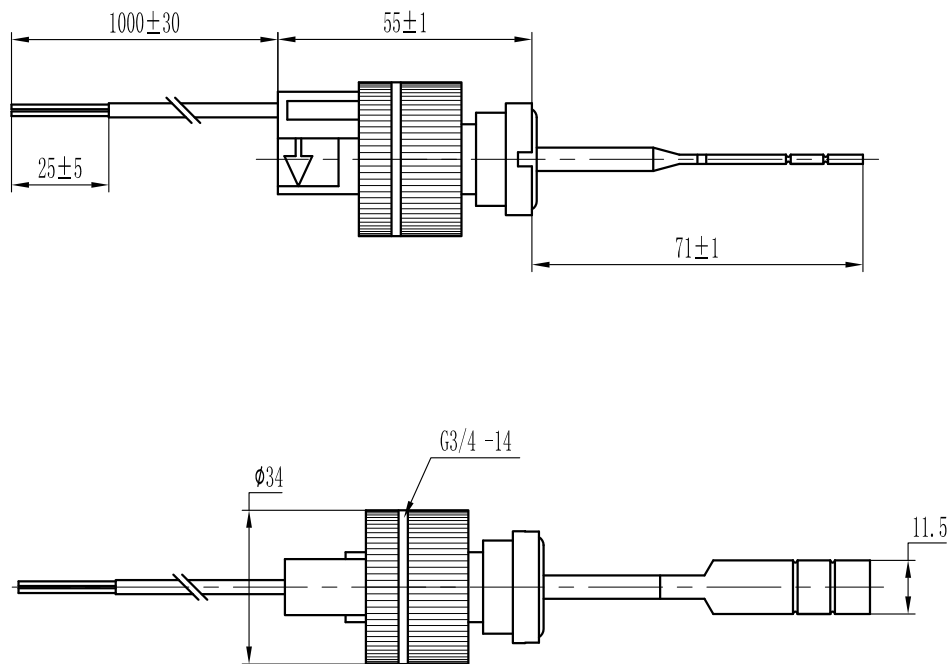

BOM					Reed switch Electrical Specification		Product features	
No	Part name	Specification	Material	Quantity	1.Contact form	A(NO.)	1.Applicable temperature[]	-10~+85
1	Switch housing	—	PA6+GF15	1PC	2.Contact rating[W]	50	2.Withstand voltage	1000V/10S
2	Main bracket magnet	∅6*8	—	1PC	3.Max switching voltage[V]	DC350/AC300	3.The contact resistance[mΩ]	N/A
3	Main bracket	—	PA6+GF15	1PC	4.Breakdown voltage[V]	600VDC	4.Insulation resistance[MΩ]	100min
4	Cap nut	G3/4-14	PA6+GF15	1PC	5.Max switching current[A]	DC0.7/AC0.5	5.Resistance pressure	≤10 Bar
5	blade	—	PA6+GF15	1PC	6.Max carry current[A]	2.5		
6	Wire	UL2464-2C 26#	PVC black	1000mm	7.Contact resistance[mΩ]	100max		
7	Filling	5321A black+5323B	epoxy glue	—	8.Insulation resistance[Ω]	10 ¹⁰ min		
8	alignment pin	∅1.5*13.5	SUS304	1PC	9.Get an electric shock life	10 ⁷		
9	Housing	∅22*∅4	Silicone	1PC				
10	Reed switch	—	Imported	1PC	designed by	Checked by	Drawing by	Drawing Date
11	Circuit board	—	—	—				
						Scale	Sheet	Edition
						1:1	1	A